


BIRCOcanal | NW 150

The Supply Channel for Heavy Duty Areas

Supply channels with angles | without cast-in mounting rails

- + With hot-dipped galvanised solid steel angles for combi-closure system
- + Safety sealing joint

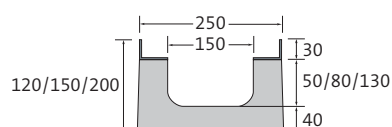

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	1000 mm	250/120 mm	150/50 mm	48.0 kg	A 15 – E 600	052110
Supply channel	1000 mm	250/150 mm	150/80 mm	51.0 kg	A 15 – E 600	052111
Supply channel	1000 mm	250/200 mm	150/130 mm	63.0 kg	A 15 – E 600	052112

Bulb ductile iron covers | for supply channels with angles

- + Solid
- + Black immersion-lacquered or galvanised
- + 8 point per metre M12/A2 bolt connection
- + 8 point per metre Easylock-fastening (alternatively)



Description	Length	Width	Height	Weight	Load class DIN EN 1433	Article No.
black	500 mm	237 mm	30 mm	10.5 kg	A 15 – E 600	052176/e
galvanised	500 mm	237 mm	30 mm	10.5 kg	A 15 – E 600	052176v/ve

Article No. with v = galvanised, Article No. with e = with Easylock
Exception up to D 400: Not for use across the carriage- way of highways or motorways.