


BIRCOcanal | NW 700

The Supply Channel for Heavy Duty Areas

Supply channels without angles | cast-in mounting rails

- + Reinforced grade C 40/50 concrete
- + Safety sealing joint
- + Cast-in anchor sleeves RD 14 for mechanical installation
- + Cast-in mounting rails type 28/15, hot-dipped galvanised

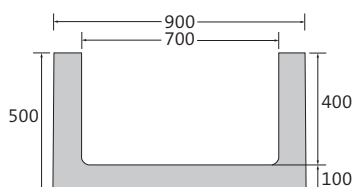

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	2000 mm	900/500 mm	700/400 mm	850.0 kg	A 15 – E 600	050720

Supply channels without angles | without cast-in mounting rails

- + Reinforced grade C 40/50 concrete
- + Safety sealing joint
- + Cast-in anchor sleeves RD 14 for mechanical installation

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	2000 mm	900/500 mm	700/400 mm	845.0 kg	A 15 – E 600	050740

Reinforced concrete cover | for supply channels without angles

- + Smoothed surface
- + 2 cast-in anchor sleeves RD 14 for mechanical installation



Description	Length	Width	Height	Weight	Load class	Article No.
Reinforced concrete cover	2000 mm	900 mm	125 mm	630.0 kg	SLW 60	050798

! Please ensure that a sealing tape is generally stuck down between BIRCOcanal and the reinforced concrete cover.

➔ BIRCOcanal | Accessories

- + Different accessories for BIRCOcanal are listed on page 99.

Exception up to D 400: Not for use across the carriage-way of highways or motorways.