


BIRCOtop | Serie S

For the discreet line drainage of building façades

Channel elements | asymmetrical


- + Stainless steel (V2A)
- + Also available in galvanised steel
- + Closed or perforated on one side
- + Including removable rectangular hole cover
- + Other construction heights, construction lengths (up to a maximum of 3000 mm) and slot widths as well as other covers (perforated and slotted grates) available upon request
- + Also available as a symmetrical slot channel
- + Drainage openings, tailored special lengths and mitred cuts are also possible

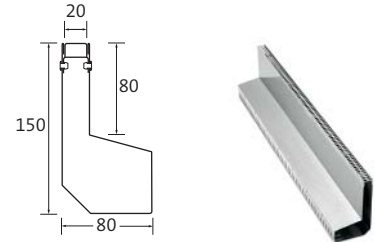

Description	Length	Width	Construction height	Weight	Inlet opening	Inlet cross section	Load class	Article no.
Channel, closed	3000 mm	80 mm	150 mm	14.1 kg	20 mm	106 cm ² /m	walkable	065901
Channel, perforated	3000 mm	80 mm	150 mm	13.9 kg	20 mm	106 cm ² /m	walkable	065902

End caps and connection shoe


- + Stainless steel (V2A)
- + Also available in galvanised steel
- + Sealing required on the building site



Description	Width	Height	Weight	Load class	Article no.
End cap, right	80 mm	150 mm	0.1 kg	walkable	065940
End cap, left	80 mm	150 mm	0.1 kg	walkable	065941
Connection shoe	80 mm	55 mm	0.1 kg	walkable	065925

Maintenance chambers

- + Stainless steel (V2A)
- + Also available in galvanised steel
- + Horizontal or vertical drain DN 100
- + Excavation trough for cobblestone pavements upon request
- + Various connection possibilities



Description	Length	Width	Construction height	Weight	Load class	Article no.
horizontal	300 mm	300 mm	260 mm	5,8 kg	walkable	on request
vertical	300 mm	300 mm	150 mm	4,5 kg	walkable	on request