


BECAUSE WATER
IS PRECIOUS.



BIRCOparksafe®

Elegant, quiet and efficient – the new BIRCOparksafe® for multi-storey and underground car parks.

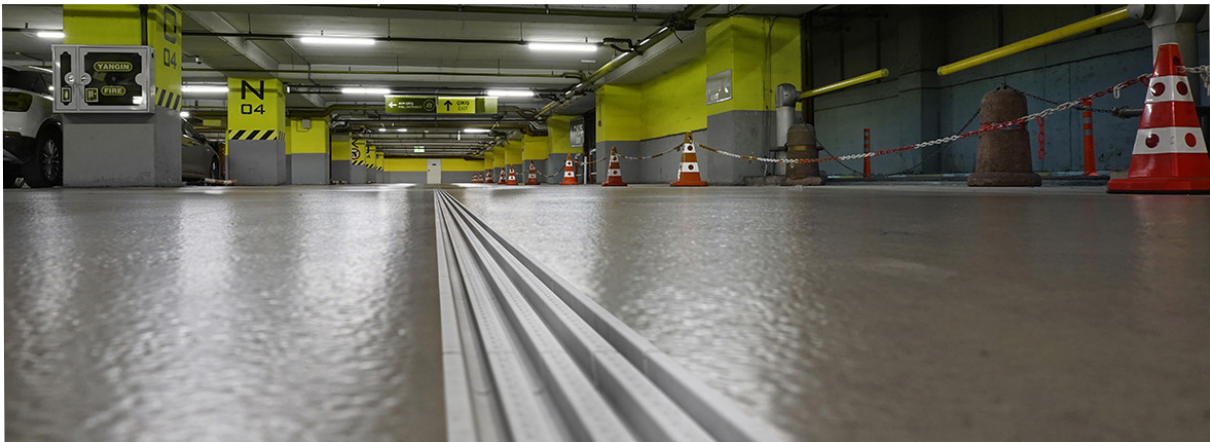

BIRCOparksafe® is the ideal drainage solution for multi-storey and underground car parks. The barrier-free system fulfils all the requirements in this area. The monolithic design and the level cross profile prevent annoying rattling noises when the channel is driven over.

With an installation height of just 50 mm, the BIRCOparksafe® is perfect for quick and easy installation. The intelligent design also guarantees very maintenance-friendly operation of the system, whether for cleaning or checking the sealing joints. Rain or melt water is drained away directly and easily. This not only increases safety in multi-storey and underground car parks, but also helps to protect the property.

BIRCOparksafe® | Facts

- Channel system in 160 mm, without internal slope, with and without outlet
- Sturdy monolithic concrete channel with low weight (approx. 14 kg/pc)
- Length: 1.00 meter
- Load class: C 250
- Anti-slip surface
- UV-resistant and abrasion-resistant
- Resistant to frost and de-icing salt
- Barrier-free
- 100% recyclable

BIRCOparksafe® | Areas of application


- Multi-storey and underground car parks
- Gardens and façades

BIRCO parksafe® | Monolithic drainage channel – Width 160, Height 50 mm

Low height, maximal performance

BIRCO PARKSAFE® | DRAINAGE AND EVAPORATION CHANNEL

- + Monolithic channel without internal slope
- + Channel with and without outlet
- + Slot width: 18 mm
- + Crossing elements save cutting on site
- + Reservation for seal
- + Barrier-free



DESIGNATION	LENGTH	WIDTH	HEIGHT	WEIGHT	LOAD CLASS	ARTICLE NO.
Channel, width 160 without outlet	1000 mm	160 mm	50 mm	14.0 kg	A 15 – C 250	181126
Channel, width 160 with outlet	1000 mm	160 mm	50 mm	14.0 kg	A 15 – C 250	181133

ACCESSORIES



DESIGNATION	LENGTH	WIDTH	HEIGHT	WEIGHT	ARTICLE NO.
Crossing element	160 mm	160 mm	50 mm	2.5 kg	181182
Outlet cover	–	–	–	0.1 kg	181169
End cap, stainless steel (V2A)	160 mm	50 mm		0.1 kg	181140
Construction time cover	1000 mm	160 mm	–	0.5 kg	181181
Installation support/support stand	270 mm	100 mm	up to 255 mm	0.7 kg	181180
Cleaning rake (V2A), diameter 28 mm		160 mm		0,4 kg	181110