


BIRCOcanal | NW 200

The Supply Channel for Heavy Duty Areas

Supply channels with angles | cast-in mounting rails

- + With hot-dipped galvanised solid steel angles for combi-closure system
- + Safety sealing joint
- + Cast-in mounting rails type 28/15, hot-dipped galvanised

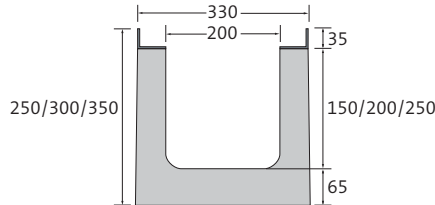

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	1000 mm	330/250 mm	200/150 mm	107.0 kg	A 15 – E 600	052210
Supply channel	1000 mm	330/300 mm	200/200 mm	118.0 kg	A 15 – E 600	052211
Supply channel	1000 mm	330/350 mm	200/250 mm	134.0 kg	A 15 – E 600	052212

Supply channels with angles | without cast-in mounting rails

- + With hot-dipped galvanised solid steel angles for combi-closure system
- + Safety sealing joint

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	1000 mm	330/250 mm	200/150 mm	103.0 kg	A 15 – E 600	052230
Supply channel	1000 mm	330/300 mm	200/200 mm	127.0 kg	A 15 – E 600	052231
Supply channel	1000 mm	330/350 mm	200/250 mm	147.0 kg	A 15 – E 600	052232

Bulb ductile iron covers | for supply channels with angles

- + Solid
- + Black immersion-lacquered or galvanised
- + 8 point per metre M12/A2 bolt connection
- + 8 point per metre Easylock-fastening (alternatively)




Description	Length	Width	Height	Weight	Load class DIN EN 1433	Article No.
black	500 mm	317 mm	35 mm	14.8 kg	A 15 – E 600	052276/e
galvanised	500 mm	317 mm	35 mm	14.2 kg	A 15 – E 600	052276v/e

Article No. with v = galvanised, Article No. with e = with Easylock
Exception up to D 400: Not for use across the carriage- way of highways or motorways.



Supply channels without angles | cast-in mounting rails

- + Safety sealing joint
- + Cast-in mounting rails type 28/15, hot-dipped galvanised

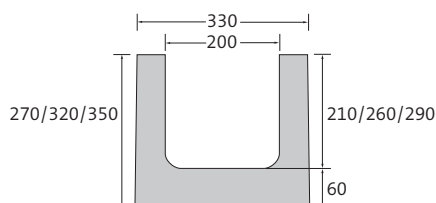

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	1000 mm	330/270 mm	200/210 mm	112.0 kg	A 15 – E 600	050210
Supply channel	1000 mm	330/320 mm	200/260 mm	125.0 kg	A 15 – E 600	050211
Supply channel	1000 mm	330/350 mm	200/290 mm	140.0 kg	A 15 – E 600	050212

Supply channels without angles | without cast-in mounting rails

- + Safety sealing joint

Description	Length	External dimension Width/Construction height	Internal dimension Width/Height	Weight	Load class DIN EN 1433	Article No.
Supply channel	1000 mm	330/270 mm	200/210 mm	111.5 kg	A 15 – E 600	050230
Supply channel	1000 mm	330/350 mm	200/290 mm	137.5 kg	A 15 – E 600	050232

Reinforced concrete cover | for supply channels without angles

- + Smoothed surface
- + 2 cast-in anchor sleeves RD 12 for mechanical installation



Description	Length	Width	Height	Weight	Load class	Article No.
Reinforced concrete cover	1000 mm	330 mm	100 mm	90.0 kg	SLW 60	050298

[!] Please ensure that a sealing tape is generally stuck down between BIRCOcanal and the reinforced concrete cover.

➔ BIRCOcanal | Accessories

- + Different accessories for BIRCOcanal are listed on page 99.